


**PLAN**

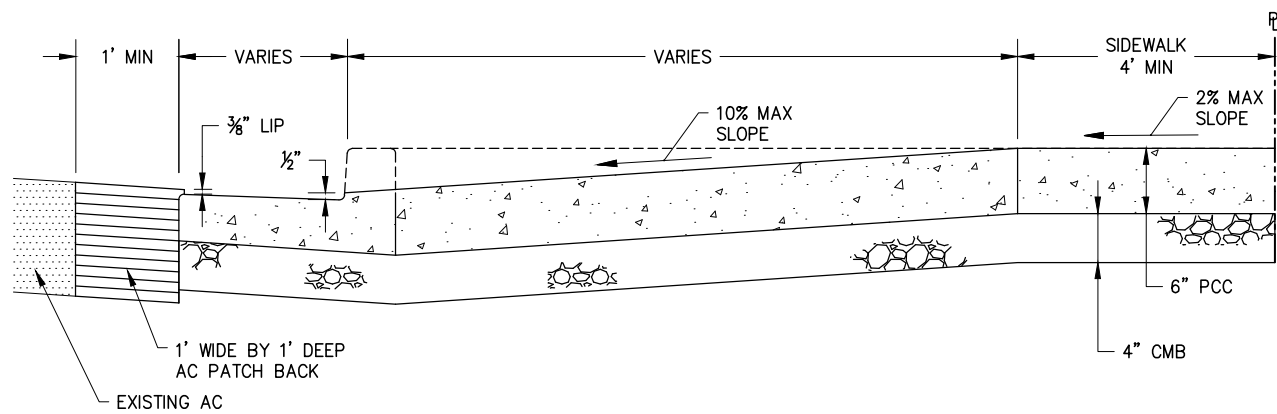

**SECTION A-A**

**NOTES:**

1. WHEN REMOVING EXISTING SIDEWALK AND CURB AND GUTTER, SAWCUT AND REMOVE TO NEAREST EXISTING JOINT WITHIN 5 FEET BEYOND CURB OPENING.
2. SLOPED "X" AREAS AND SLOPE DRIVEWAYS SHALL HAVE A COARSE BROOM FINISH.
3. CONCRETE SHALL BE 560-C-3250.

FORMER CITY STANDARD PLAN NUMBER (2004 EDITION): STD 161-L

APP. *James M. Hinkle* 51568 11/24/2020  
 CITY ENGINEER RCE DATE

NO.	DATE	DESCRIPTION OF REVISIONS

**CITY OF NEWPORT BEACH DEPARTMENT OF PUBLIC WORKS**

DRAWN: P. KHARAZMI  
 DATE: 11/3/2020

**COMMERCIAL DRIVEWAY APPROACH TYPE II**

STANDARD DRAWING NO.

**161**

SHEET 1 OF 1