


PORTLAND CEMENT CONCRETE ALLEY

NOTES:

1. CONCRETE SHALL BE 560-C-3250 UNLESS OTHERWISE SPECIFIED.
2. ALLEYS EXCEEDING 16 FEET IN WIDTH SHALL BE CONSTRUCTED WITH 4-FOOT WIDE, 6-INCH THICK PCC STRIP GUTTERS WITH KEYWAY ALONG EACH SIDE.
3. ALLEY SHALL BE FINISHED FROM EDGE TO CENTER ALONG EACH SIDE, NOT FROM EDGE TO EDGE. A CONSISTENT, WELL-DEFINED VEE SHALL BE MAINTAINED.
4. WRAP ALL POWER POLES WITH $\frac{3}{8}$ " PREMOLDED JOINT FILLER.
5. WEAKENED PLANE JOINTS AND PREMOLDED JOINT FILLER SHALL BE PER STD 141.
6. CENTERLINE AND BOTH PROPERTY LINE GRADES SHALL BE SHOWN ON IMPROVEMENT PLANS.

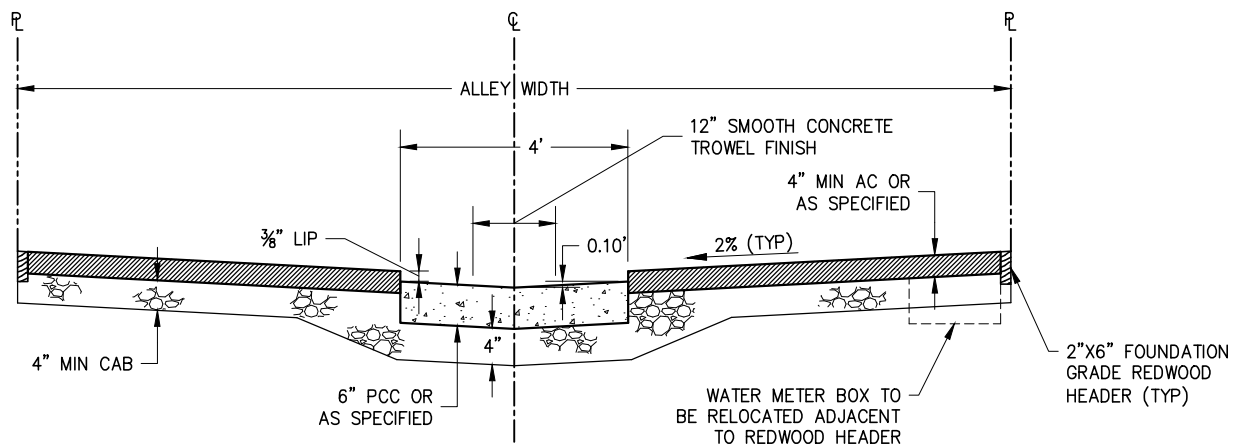

ASPHALT CONCRETE ALLEY WITH PCC GUTTER

FORMER CITY STANDARD PLAN NUMBER (2004 EDITION): STD 140-L

APP.	 CITY ENGINEER	51568 RCE	11/24/2020 DATE	
				NO. DATE DESCRIPTION OF REVISIONS

CITY OF NEWPORT BEACH DEPARTMENT OF PUBLIC WORKS

DRAWN: P. KHARAZMI
DATE: 11/3/2020

TYPICAL ALLEY SECTIONS

STANDARD DRAWING NO.

140

SHEET 1 OF 1