


PLAN

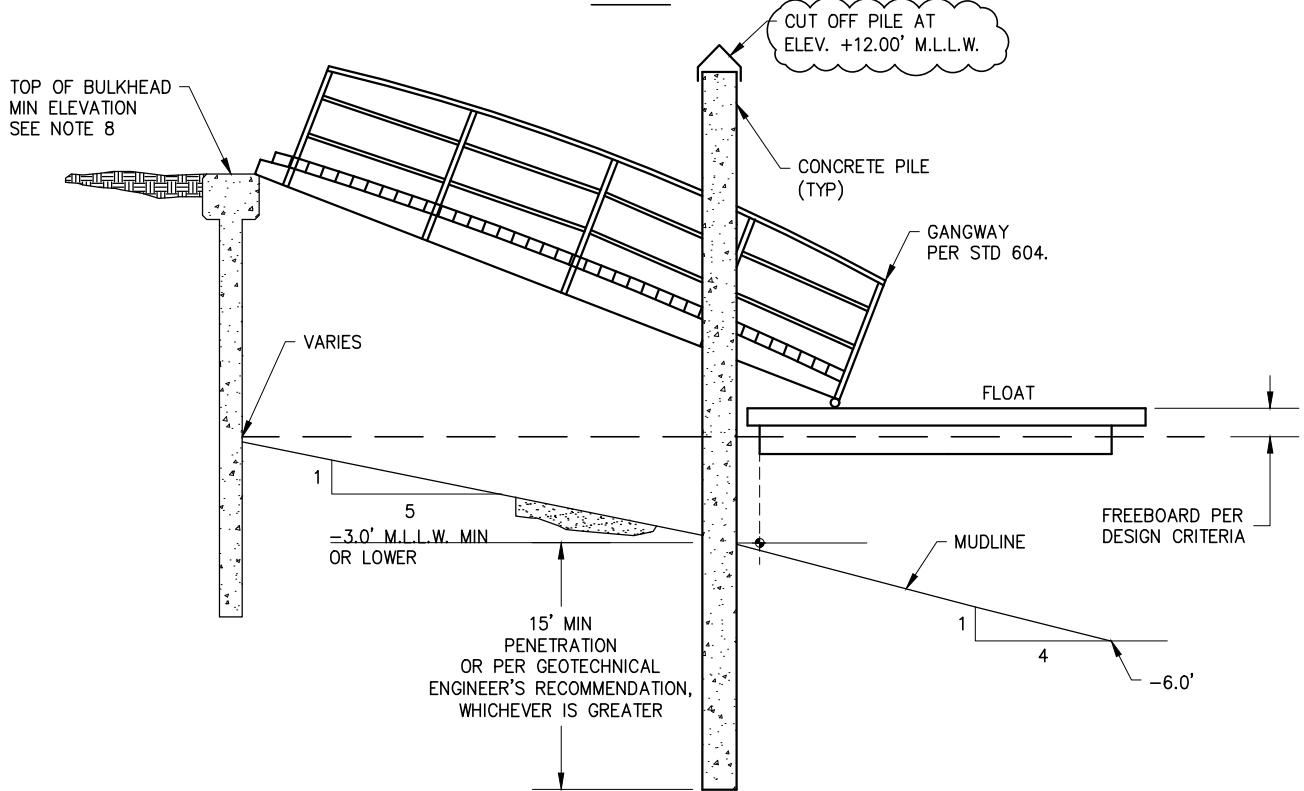

PROFILE

NOTES:

1. TIMBER SHALL BE SELECT STRUCTURAL DOUGLAS FIR TREATED WITH PRESERVATIVE APPROVED BY THE STATE OF CALIFORNIA (CALIFORNIA COASTAL COMMISSION AND REGIONAL WATER QUALITY CONTROL BOARD).
2. FIELD CUTS AND BORED HOLES SHALL RECEIVE A BRUSH COAT OF PRESERVATIVE TREATMENT PER STATE AND FEDERAL GUIDELINES.
3. FASTENERS SHALL BE STAINLESS, HOT DIP GALVANIZED OR EPOXY-COATED STEEL.
4. WALKING SURFACES SHALL HAVE A SKID RESISTANT FINISH, SUCH AS UNPAINTED TIMBER OR GRIT ON TIMBER, OR OTHER SURFACING DEEMED APPROPRIATE FOR THE INTENDED SERVICE, BY THE CITY.
5. NON-STRUCTURAL MEMBERS MAY BE ALTERNATIVE MATERIALS SUCH AS COMPOSITE DIMENSIONAL LUMBER, SUBMIT PRODUCT SPECIFICATIONS TO THE CITY FOR APPROVAL.
6. SEE STD 604 & HARBOR DESIGN CRITERIA FOR GANGWAY DESIGN REQUIREMENTS.
7. LOCATION OF PLATFORM, GANGWAY, SLIP & FLOATS IS OPTIONAL PROVIDING PROPER SETBACKS ARE MAINTAINED.
8. SEE TABLE NO. 2 IN THE HARBOR DESIGN CRITERIA FOR MINIMUM BULKHEAD ELEVATIONS.

APP.	51568 RCE	11/24/2020 DATE	
CITY ENGINEER	RCE	DATE	

CITY OF NEWPORT BEACH DEPARTMENT OF PUBLIC WORKS

DRAWN: P. KHARAZMI	SINGLE RESIDENTIAL USE FLOAT WEST NEWPORT CHANNELS	606
DATE: 11/3/2020		STANDARD DRAWING NO. SHEET 1 OF 1